



(11) **EP 1 769 655 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
28.09.2011 Bulletin 2011/39

(21) Application number: **05761091.7**

(22) Date of filing: **07.07.2005**

(51) Int Cl.:
H04S 3/02 (2006.01)

(86) International application number:
PCT/IB2005/052254

(87) International publication number:
WO 2006/008683 (26.01.2006 Gazette 2006/04)

(54) **METHOD, DEVICE, ENCODER APPARATUS, DECODER APPARATUS AND AUDIO SYSTEM**
VERFAHREN, VORRICHTUNG, KODIERER, DEKODIERER UND AUDIOSYSTEM
METHODE, DISPOSITIF, APPAREIL DE CODAGE, APPAREIL DE DECODAGE ET SYSTEME AUDIO

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

(30) Priority: **14.07.2004 EP 04103365**

(43) Date of publication of application:
04.04.2007 Bulletin 2007/14

(60) Divisional application:
10152627.5 / 2 175 671

(73) Proprietors:
• **Koninklijke Philips Electronics N.V.**
5621 BA Eindhoven (NL)
• **Dolby Sweden AB**
113 30 Stockholm (SE)

(72) Inventors:
• **VAN LOON, Machiel, W.**
NL-5656 AA Eindhoven (NL)

- **BREEBAART, Dirk, J.**
NL-5656 AA Eindhoven (NL)
- **HOTH0, Gerard, H.**
NL-5656 AA Eindhoven (NL)
- **SCHUIJERS, Erik, G., P.**
NL-5656 AA Eindhoven (NL)
- **PURNHAGEN, Heiko**
S-113 52 Stockholm (SE)
- **RÖDÉN, Karl, J.**
S-113 52 Stockholm (SE)

(74) Representative: **Zinkler, Franz et al**
Schoppe, Zimmermann, Stöckeler & Zinkler
Patentanwälte
Postfach 246
82043 Pullach bei München (DE)

(56) References cited:
EP-A- 0 858 243 US-A- 5 818 941
US-A1- 2003 210 794 US-B1- 6 697 491

EP 1 769 655 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a method and a device for processing a stereo down-mix signal comprising first and second stereo signals, the stereo down-mix signal and associated spatial parameters encoding an N-channel audio signal. The invention also relates to an encoder apparatus comprising an encoder and such a device.

[0002] The invention also relates to a method and a device for processing a stereo down-mix signal obtained by such a method and device. The invention also relates to a decoder apparatus comprising such a device for processing a stereo down-mix signal.

[0003] The invention also relates to an audio system comprising such an encoder apparatus and such a decoder apparatus.

[0004] For a long time, stereo reproduction of music, for example, in the home environment has been prevailing. During the 1970s, some experiments were done with four-channel reproduction of home music equipment.

[0005] In larger halls, such as film theatres, multi-channel reproduction of sound has been present for a long time. Dolby Digital® and other systems were developed for providing realistic and impressive sound reproduction in a large hall.

[0006] Such multi-channel systems have been introduced in the home theatre and are gaining wide interest. Thus, systems having five full-range channels and one part-range channel or low-frequency effects (LFE) channel, referred to as 5.1 systems, are common on the market today. Other systems also exist, such as 2.1, 4.1, 7.1 and even 8.1.

[0007] With the introduction of SACD and DVD, multi-channel audio reproduction is gaining ground. Many consumers already have the possibility of multi-channel playback in their homes, and multi-channel source material is becoming popular. However, many people still have only 2-channel reproduction systems, and transmission usually takes place via 2 channels. For this reason, matrixing techniques like e.g. Dolby Surround® were developed, to make transmission of multi-channel audio via 2 channels possible. The transmitted signal can be played back directly with a 2-channel reproduction system. When an appropriate decoder is available, multi-channel playback is possible. Well-known decoders for this purpose are Dolby Pro Logic® (I and II), (Kenneth Gundry, "A new active matrix decoder for surround sound", In Proc. AES 19th International Conference on Surround Sound, June 2001) and Circle Surround® (I and II) (US patent No. 6,198,827: 5-2-5 matrix system).

[0008] Because of the increased popularity of multi-channel material, efficient coding of multi-channel material is becoming more important. Matrixing reduces the number of audio channels required for transmission and thus reduces the required bandwidth or bit rate. An extra advantage of the matrix technique is that it is backward compatible with stereo reproduction systems. For further reduction of the bit rate, a conventional audio coder can be applied to encode the matrixed stereo signal.

[0009] Another possibility to reduce the bit rate is by encoding all the individual channels without matrixing. This method results in a higher bit rate, because five channels have to be encoded instead of two, but the spatial reconstruction can be much closer to the original than by applying matrixing.

[0010] In principle, the matrixing process is a lossy operation. Therefore, perfect reconstruction of the 5 channels from only a 2-channel mix is generally impossible. This property limits the maximum perceptual quality of the 5-channel reconstruction.

[0011] Recently, a system has been developed that encodes multi-channel audio as a 2-channel stereo audio signal and a small number of spatial parameters or encoder information parameters *P*. Consequently, this system is backward compatible for stereo reproduction. The transmitted spatial parameters or encoder information parameters *P* determine how the decoder should reconstruct five channels from the available two-channel stereo down-mix signal. Due to the fact that the up-mix process is controlled by transmitted parameters, the perceptual quality of the 5-channel reconstruction improves considerably as compared to up-mix algorithms without controlling parameters (e.g., Dolby Pro Logic).

[0012] In summary, three different methods can be applied to generate a 5-channel reconstruction from a provided two-channel mix:

- 1) Blind reconstruction. This method tries to estimate the up-mix matrix based on signal properties only, without any provided information.
- 2) Matrixing techniques, e.g. Dolby Pro Logic. By applying a certain down-mix matrix, the reconstruction from 2 to 5 channels can be improved due to certain signal properties that are determined by the applied down-mix matrix.
- 3) Parameter-controlled up-mix. In this method, the encoder information parameters *P* are typically stored in ancillary parts of a bit stream, ensuring backward compatibility with normal stereo playback systems. However, these systems are generally not backward compatible with matrixing systems.

[0013] It may be of interest to combine methods 2 and 3 mentioned above to a single system. This ensures maximum quality, dependent on the available decoder. For consumers who have a matrix surround decoder, such as Dolby Pro Logic or Circle Surround, a reconstruction is obtained in accordance with the matrix process. If a decoder is available that is able to interpret the transmitted parameters, a higher quality reconstruction can be obtained. Consumers who do

not have a matrix surround decoder or a decoder that can interpret the spatial parameters can still enjoy the stereo backward compatibility. However, one problem of combining methods 2 and 3 is that the actual transmitted stereo down-mix will be modified. This, in turn, might have an adverse effect on the 5-channel reconstruction using the spatial parameters.

5 **[0014]** US 5 818 941 A (EMBREE ET AL, 1998-10-06) and US 6 697 491 B1 (GRIESINGER DAVID H, 2004-02-24) disclose surround decoders where the directional parametric decoding is applied to the N-channels rather than the 2 downmixed channels.

[0015] It is an object of the invention to provide a method allowing combination of parametric multi-channel audio coding with matrixing techniques, with which method a full-quality multi-channel reconstruction can be realized, independent of the available decoder.

10 **[0016]** According to the invention, this object is achieved by means of a method of processing a stereo down-mix signal comprising first and second stereo signals, the stereo down-mix signal and associated spatial parameters encoding an N-channel audio signal, the method comprising the steps of:

- 15 - adding a first signal and a third signal to obtain a first output signal, wherein said first signal comprises said first stereo signal modified by a first complex function, and wherein said third signal comprises said second stereo signal modified by a third complex function; and
- adding a second signal and a fourth signal to obtain a second output signal, wherein said fourth signal comprises said second stereo signal modified by a fourth complex function and wherein said second signal comprises said first stereo signal modified by a second complex function;
- 20 - wherein said complex functions are functions of said spatial parameters and are chosen to be such that an energy value of the difference between the first signal and the second signal is larger than or equal to the energy value of the sum of the first and the second signal, and such that the energy value of the difference between the fourth signal and the third signal is larger than or equal to the energy value of the sum of the fourth signal and the third signal.
- 25 Accordingly, front/back steering in the decoder is enabled.

[0017] The energy value of these difference and sum signals may be based on the 2-norm (i.e. sum of squares over a number of samples) or the absolute value of these signals. Also other conventional energy measures may be applied here.

30 **[0018]** In an embodiment of the invention, the N-channel audio signal comprises front-channel signals and rear-channel signals, and said spatial parameters comprise a measure of the relative contribution of the rear channels in the stereo down-mix as compared to the contribution of the front channels therein. This is because selection of rear-channel contribution is necessary.

[0019] The magnitude of said second complex function may be smaller than the magnitude of said first complex function to enable left/right rear steering and/or the magnitude of said third complex function is smaller than the magnitude of said fourth complex function.

[0020] The second complex function and/or the third complex function may comprise a phase shift, which is substantially equal to plus or minus 90 degrees in order to prevent signal cancellation with front channel contribution.

40 **[0021]** In another embodiment of the invention, said first function comprises first and second function parts, wherein the output of said second function part increases when said spatial parameters indicate that a contribution of the rear channels in said first stereo signal increases as compared to the contribution of the front channels, and said second function part comprises a phase shift which is substantially equal to plus or minus 90 degrees. This is to prevent signal cancellation with front channels. Moreover, said fourth function may comprise third and fourth function parts, wherein the output of said fourth function part increases when said spatial parameters indicate that the contribution of the rear channels in said second stereo signal increases as compared to the contribution of the front channels, and said fourth function part comprises a phase shift which is substantially equal to plus or minus 90 degrees.

[0022] The first function part may have an opposite sign as compared to said fourth function part. The second function may have an opposite sign as compared to said third function. The second function and the fourth function part may have the same sign, and the third function and the second function part may have the same sign.

50 **[0023]** In another aspect of the invention, a device is provided for processing a stereo signal in accordance with the above-mentioned methods, and an encoder apparatus comprising such a device.

[0024] In another aspect of the invention, a method is provided for processing a stereo down-mix signal comprising first and second stereo signals, the method comprising the step of inverting the processing operation in accordance with the above-mentioned methods.

55 **[0025]** In another aspect of the invention, a device is provided for processing a stereo down-mix signal in accordance with the above-mentioned method of processing a stereo down-mix signal, and a decoder apparatus comprising such a device.

[0026] In yet another aspect of the invention, an audio system is provided, comprising such an encoder apparatus

and such a decoder apparatus.

[0027] Further objects, features and advantages of the invention will appear from the following detailed description of the invention with reference to embodiments thereof and to the appended drawings, in which:

- 5 Fig. 1 is a block diagram of an encoder/decoder audio system including post-processing and inverse post-processing according to the invention.
- Fig. 2 is a block diagram of an embodiment of a device for processing a stereo signal in accordance with the invention.
- Fig. 3 is a detailed block diagram similar to Fig. 2, showing further details of the invention.
- Fig. 4 is a detailed block diagram similar to Fig. 3, showing still further details of the invention.
- 10 Fig. 5 is a detailed block diagram similar to Fig. 3, showing yet further details of the invention.
- Fig. 6 is a block diagram of an embodiment of a device for processing a stereo down-mix signal in accordance with the invention.

[0028] The inventive method is able to make matrix decoding possible without degrading the parametric multi-channel reconstruction. That is possible because the matrixing techniques are applied in the encoder after down-mixing, in contradiction with usual matrixing, which is done before down-mixing. The matrixing of the down-mix is controlled by the spatial parameters.

[0029] If the applied matrix is invertible, the decoder can undo the matrixing based on the transmitted encoder information parameters P .

20 **[0030]** Conventionally, matrixing is applied on the original N-channel input signal. However, this approach is not suitable here, since inversion of this matrixing, which is a prerequisite for correct N-channel reconstruction, is generally impossible, because only 2 channels are available at the decoder. Thus, one feature of this invention is to replace the matrixing technique, which is normally applied on the 5-channel mix, by a parameter-controlled modification of the two-channel mix.

25 **[0031]** Fig. 1 is a block diagram of an encoder/decoder audio system incorporating the invention. In the audio system 1, an N-channel audio signal is supplied to an encoder 2. The encoder 2 transforms the N-channel audio signal to stereo channel signals L_0 and R_0 and encoder information parameters P , by means of which a decoder 3 can decode the information and approximately reconstruct the original N-channel signal to be output from the decoder 3. The N-channel signals may be signals for a 5.1 system, comprising a center channel, two front channels, two surround channels and a Low Frequency Effects (LFE) channel.

30 **[0032]** Conventionally, the encoded stereo channel signals L_0 and R_0 and encoder information parameters P are transmitted or distributed to the user in a suitable way, such as by CD, DVD, broadcast, laser disc, DBS, digital cable, Internet or any other transmission or distribution system, indicated by the circle 4 in Fig. 1. Since the left and right stereo signals L_0 and R_0 are transmitted or distributed, the system 1 is compatible with the vast number of receiving equipment that can only reproduce stereo signals. If the receiving equipment includes a parametric multi-channel decoder, the decoder may decode the N-channel signals by providing an estimate thereof on the basis of the information in the stereo channels L_0 and R_0 as well as the encoder information parameters P .

35 **[0033]** Now, assume an N-channel audio signal, with N being an integer which is larger than 2, and where $z_1[n]$, $z_2[n]$, ..., $z_N[n]$ describe the discrete time-domain waveforms of the N channels. These N signals are segmented by using a common segmentation, preferably using overlapping analysis windows. Subsequently, each segment is converted to the frequency domain, using a complex transform (e.g. FFT). However, complex filter-bank structures may also be appropriate to obtain time/frequency tiles. This process results in segmented, sub-band representations of the input signals, which will be denoted by $Z_1[k]$, $Z_2[k]$, ..., $Z_N[k]$ with k denoting the frequency index.

40 **[0034]** From these N channels, 2 down-mix channels are created, namely $L_0[k]$ and $R_0[k]$. Each down-mix channel is a linear combination of the N input signals:

$$L_0[k] = \sum_{i=1}^N \alpha_i Z_i[k]$$

$$R_0[k] = \sum_{i=1}^N \beta_i Z_i[k]$$

45 **[0035]** The parameters α_i and β_i are chosen to be such that the stereo signal consisting of $L_0[k]$ and $R_0[k]$ has a good stereo image.

[0036] On the resulting stereo signal, a post-processor 5 can apply processing in such a way that it mainly affects the contribution of a specific channel i in the stereo mix. As processing, a specific matrixing technique can be chosen. This results in the left and right matrix-compatible signals $L_{Ow}[k]$ and $R_{Ow}[k]$. These, together with the spatial parameters are transmitted to the decoder as illustrated by the circle 6 in Figure 1. The device for processing a stereo signal obtained from an encoder comprises the post-processor 5. The encoder apparatus according to the invention comprises the encoder 2 and the post-processor 5.

[0037] The post-processed signals L_{Ow} and R_{Ow} may be supplied to a conventional stereo receiver (not shown) for playback. Alternatively, the post-processed signals L_{Ow} and R_{Ow} may be supplied to a matrix decoder (not shown), e.g. a Dolby Pro Logic® decoder or a Circle Surround® decoder. Yet another possibility is to supply the post-processed signals L_{Ow} and R_{Ow} to an inverse post-processor 7 for undoing the processing of the post-processor 5. The resulting signals L_0 and R_0 can be supplied by the post-processor 7 to a multi-channel decoder 3. The device for processing a stereo down-mix signal comprises the inverse post-processor 7. The decoder apparatus according to the invention comprises the decoder 3 and the inverse post-processor 7.

[0038] In the decoder 3, the N input channels are reconstructed as follows:

$$\hat{Z}_i[k] = C_{1,z_i} L_0[k] + C_{2,z_i} R_0[k],$$

where $\hat{Z}_i[k]$ is an estimate of $Z_i[k]$. The filters C_{1,z_i} and C_{2,z_i} are preferably time and frequency-dependent, and their transfer functions are derived from the transmitted encoder information parameters P .

[0039] Fig 2 shows how this post-processing block 5 may be embodied to make matrix decoding possible. The left input signal $L_0[k]$ is modified by a first complex function g_1 , which results in a first signal $L_{OwL}[k]$ which is fed to the left output $L_{Ow}[k]$. The left input signal $L_0[k]$ is also modified by a second complex function g_2 , which results in a second signal $R_{OwL}[k]$ which is fed to the right output $R_{Ow}[k]$. The functions g_1 and g_2 are chosen to be such that the difference signal $L_{OwL} - R_{OwL}$ has an equal or larger energy than the sum signal $L_{OwL} + R_{OwL}$. This is because, in the matrix decoding, the ratio of the sum and difference signal is used to perform front/back steering. When the difference signal becomes larger, more input signal is steered to the rear. Because of this $R_{OwL}[k]$ has to increase when the contribution of the left rear in $L_0[k]$ increases. This control procedure is done by the functions g_1 and g_2 , which are both functions of the spatial parameters P . These functions are chosen, such that the amount of processing of the left input channel increases when the contribution of the left rear in $L_0[k]$ increases.

[0040] The magnitude of g_2 is preferably smaller than the magnitude of g_1 . This allows left/right rear steering in the decoder.

[0041] The right input signal $R_0[k]$ is modified by a fourth function g_4 , which results in a fourth signal $R_{OwR}[k]$, which is fed to the right output $R_{Ow}[k]$. The right input signal $R_0[k]$ is also modified by a third function g_3 , which results in a third signal $L_{OwR}[k]$, which is fed to the left output $L_{Ow}[k]$. The functions g_3 and g_4 are chosen, such that the amount of processing of the right input channel increases when the contribution of the right rear in $R_0[k]$ increases, and also such that subtracting L_{OwR} from R_{OwR} results in a larger signal than adding them.

[0042] The magnitude of g_3 is preferably smaller than the magnitude of g_4 . This allows left/right rear steering in the decoder.

[0043] The output can be described by means of the following matrix equation:

$$\begin{bmatrix} L_{ow} \\ R_{ow} \end{bmatrix} = H \begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = \begin{bmatrix} g_1 & g_3 \\ g_2 & g_4 \end{bmatrix} \begin{bmatrix} L_0 \\ R_0 \end{bmatrix}$$

[0044] A parametric multi-channel encoder is described below. The following equations are applied:

$$L_0[k] = L[k] + C_s[k]$$

$$R_0[k] = R[k] + C_s[k]$$

in which $C_s[k]$ is the mono signal that results after combining the LFE channel and center channel. The following equations holds for $L[k]$ and $R[k]$:

$$L[k] = (c_1 \ c_2) \begin{pmatrix} L_f[k] \\ L_s[k] \end{pmatrix}$$

$$R[k] = (c_3 \ c_4) \begin{pmatrix} R_f[k] \\ R_s[k] \end{pmatrix}$$

where L_f is the left-front, L_s the left-surround, R_f the right-front and R_s the right-surround channel. The constants c_1 to c_4 control the down-mix process and may be complex-valued and/or time and frequency-dependent. An ITU-style down-mix is obtained for ($c_1, c_3 = \text{sqrt}(2)$); $c_2, c_4=1$).

[0045] In the decoder, the following reconstruction is performed:

$$\hat{L}[k] = \beta L_o[k] + (\gamma - 1)R_o[k]$$

$$\hat{R}[k] = (\beta - 1)L_o[k] + \gamma R_o[k]$$

$$\hat{C}[k] = (1 - \beta)L_o[k] + (1 - \gamma)R_o[k]$$

where $\hat{L}[k]$ is an estimate of $L[k]$, $\hat{R}[k]$ an estimate of $R[k]$ and $\hat{C}[k]$ an estimate of $C_s[k]$. The parameters β and γ are determined in the encoder and transmitted to the decoder, i.e. they are a subset of the encoder information parameters P . Additionally, the information signal P may include (relative) signal levels between corresponding front and surround channels, i.e. an Inter-channel Intensity Difference (IID) between L_f, L_s , and R_f, R_s , respectively. A convenient expression for the IID_L , describing the energy ratio between L_f and L_s is given by

$$\text{IID}_L = \frac{\sum_k L_f[k]L_f^*[k]}{\sum_k L_s[k]L_s^*[k]}$$

[0046] When these parameters are used, the scheme in Fig. 2 can be replaced by the scheme in Fig. 3. For processing the left channel $L_o[k]$, only the parameters are necessary that determine the front/back contribution in the left input channel, which are the parameters IID_L and β . For processing of the right input channel, only the parameters IID_R and γ are necessary. The function g_2 can now be replaced by the function g_3 , but with an opposite sign.

[0047] In Fig. 4, functions g_1 and g_4 are both split into two parallel function parts. The function g_1 is split into g_{11} and g_{12} . The function g_4 is split into g_{41} and $-g_{42}$. The output signals of the function part g_{12} and the function g_3 are the contributions of the rear channels. The function part g_{12} and the function g_3 need to be added with the same sign in one output so as to prevent signal cancellation and with opposite sign in the different outputs.

[0048] The function part g_{12} and the function g_3 both contain a phase shift of plus or minus 90 degrees. This is to prevent cancellation of the front channel contribution (output of function part g_{11}).

[0049] Fig. 5 gives a more detailed description of this block. The parameter w_l determines the amount of processing of $L_o[k]$ and w_r of $R_o[k]$. When w_l is equal to 0, $L_o[k]$ is not processed, and when w_l is equal to 1, $L_o[k]$ is maximally processed. The same holds for w_r with respect to $R_o[k]$.

[0050] The following generalized equations hold for the post-processing parameters w_l and w_r :

$$w_l = f_l(P)$$

$$w_r = f_r(p)$$

[0051] The blocks Φ^{-90} are all-pass filters that perform a 90-degree phase shift. The blocks G_1 and G_2 in Figure 5 are gains. The resulting outputs are:

$$\begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} = H \begin{bmatrix} L_0 \\ R_0 \end{bmatrix}, \text{ with: } H = \begin{bmatrix} 1 - w_l + w_l \Phi^{-90} & w_r \Phi^{-90} G_2 \\ -w_l \Phi^{-90} G_1 & 1 - w_r - w_r \Phi^{-90} \end{bmatrix}$$

where:

$$G_1 = f_1(w_l, w_r)$$

$$G_2 = f_2(w_l, w_r)$$

[0052] So the functions g_1, \dots, g_4 are replaced by more specific functions:

$$g_1 = 1 - w_l + w_l \Phi^{-90}$$

$$g_2 = -w_l \Phi^{-90} G_1$$

$$g_3 = w_r \Phi^{-90} G_2$$

$$g_4 = 1 - w_r - w_r \Phi^{-90}$$

[0053] The inverse of the matrix H is given by (if $\det(H) \neq 0$):

$$H^{-1} = \frac{1}{1 - w_l - w_r + w_l w_r + (w_l - w_r) \Phi^{-90} + (G_1 G_2 - 1) w_l w_r \Phi^{-180}} \begin{bmatrix} 1 - w_r - w_r \Phi^{-90} & -w_r \Phi^{-90} G_2 \\ w_l \Phi^{-90} G_1 & 1 - w_l + w_l \Phi^{-90} \end{bmatrix}$$

[0054] Hence, usage of suitable functions in the matrix H allows the matrixing process to be inverted.

[0055] The inversion can be done in the decoder without the necessity to transmit additional information, because the parameters w_l and w_r can be calculated from the transmitted parameters. Thus, the original stereo signal will be available again which is necessary for parametric decoding of the multi-channel mix.

[0056] Even better results can be achieved if the gains G_1 and G_2 are a function of the inter-channel intensity difference (IID) between the surround channels. In that case, this IID has to be transmitted to the decoder as well.

[0057] Given the above-mentioned parameter description, the following functions are used for the post-processing operation:

$$w_l = f_1(\alpha_l) f_2(\beta)$$

$$w_r = f_3(\alpha_r) f_4(\gamma)$$

[0058] Here f_1, \dots, f_4 may be arbitrary functions. For example:

$$f_1(IID) = f_3(IID) = \frac{IID}{1 + IID}$$

5

$$f_2(\beta) = f_4(\beta) = \begin{cases} 2\beta - 1 & \text{if } 0.5 < \beta < 1 \\ 1 & \text{if } \beta \geq 1 \\ 0 & \text{if } \beta \leq 0.5 \end{cases}$$

10

[0059] The all-pass filter Φ^{-90} can be efficiently realized by performing a multiplication in the (complex-valued) frequency domain with the complex operator j ($j^2 = -1$). For the gains G_1 and G_2 a function of w_l, w_r can be taken as is done in

15 Circle Surround, but also a constant is suitable with the value $1/\sqrt{2}$. This results in the matrix:

$$H = \begin{pmatrix} 1 - w_l + w_l j & \frac{1}{2} \sqrt{2w_r j} \\ -\frac{1}{2} \sqrt{2w_l j} & 1 - w_r - w_r j \end{pmatrix}$$

20

[0060] The determinant of this matrix is equal to:

25

$$\det(H) = \left(1 - w_l - w_r + \frac{3}{2} w_l w_r \right) + j(w_l - w_r)$$

30

[0061] The imaginary part of this determinant will only be equal to zero when $w_l = w_r$. In that case, the following holds for the determinant:

35

$$\det(H) = 1 - 2w_l + \frac{3}{2} w_l^2$$

40

[0062] This function has a minimum of $\det(H) = \frac{1}{3}$ for $w_l = \frac{2}{3}$.

[0063] Consequently, also for $w_l = w_r$ this matrix is invertible. Hence for gains $G_1 = G_2 = 1/\sqrt{2}$ the matrix H is always invertible, independent of the values w_l and w_r .

45

[0064] Figure 6 is a block diagram of an embodiment of the inverse post-processor 7. Like the post-processing, the inversion is done by a matrix multiplication for each frequency band:

50

55

$$\begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = H^{-1} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} = \begin{bmatrix} k_1 & k_3 \\ k_2 & k_4 \end{bmatrix} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} \quad \text{with}$$

$$k_1 = \frac{1}{g_1 g_4 - g_2 g_3} g_4$$

$$k_2 = \frac{-1}{g_1 g_4 - g_2 g_3} g_2$$

$$k_3 = \frac{-1}{g_1 g_4 - g_2 g_3} g_3$$

$$k_4 = \frac{1}{g_1 g_4 - g_2 g_3} g_1$$

[0065] Consequently, when the functions g_1, \dots, g_4 can be determined in the decoder, the functions k_1, \dots, k_4 can be determined. The functions k_1, \dots, k_4 are functions of the parameter set P , like the functions g_1, \dots, g_4 . For inversion, the functions g_1, \dots, g_4 and the parameter set P therefore need to be known.

[0066] The matrix H can be inverted when the determinant of the matrix H is unequal to zero, i.e.:

$$\det(H) = g_1 g_4 - g_2 g_3 \neq 0$$

This can be achieved by a proper choice of the functions g_1, \dots, g_4 .

[0067] Another application of the invention is to perform the post-processing operation on the stereo signal at the decoder side only (i.e. without post-processing at the encoder side). Using this approach, the decoder can generate an enhanced stereo signal from a non-enhanced stereo signal. This post-processing operation on the decoder side only may be further elaborated in a situation in which, in the encoder, the multichannel input signal is decoded into a single (mono) signal and associated spatial parameters. In the decoder, the mono signal may first be converted into a stereo signal (using the spatial parameters) and thereafter this stereo signal may be post-processed as described above. Alternatively, the mono signal may be decoded directly by a multichannel decoder.

[0068] It is to be noted that use of the verb "comprise" and its conjugations does not exclude other elements or steps and that use of the indefinite article "a" or "an" does not exclude a plurality of elements or steps. Moreover, reference signs in the claims shall not be construed as limiting the scope of the claims.

[0069] The invention has been described with reference to specific embodiments. However, the invention is not limited to the various embodiments described but may be amended and combined in different manners as is apparent to a skilled person reading the present specification.

Claims

1. A method of processing a stereo down-mix signal comprising first and second stereo signals (L_0 , R_0), the stereo down-mix signal and associated spatial parameters (P) encoding an N-channel audio signal, the method comprising the steps of:

- adding a first signal and a third signal to obtain a first output signal (L_{0w}), wherein said first signal (L_{0wL}) comprises said first stereo signal (L_0) modified by a first complex function (g_1), and wherein said third signal (L_{0wR}) comprises said second stereo signal (R_0) modified by a third complex function (g_3); and
- adding a second signal and a fourth signal to obtain a second output signal (R_{0w}), wherein said fourth signal (R_{0wR}) comprises said second stereo signal (R_0) modified by a fourth complex function (g_4) and wherein said second signal (R_{0wL}) comprises said first stereo signal (L_0) modified by a second complex function (g_2);
- wherein said complex functions (g_1, g_2, g_3, g_4) are functions of said spatial parameters (P) and are chosen to be such that an energy value of the difference ($L_{0wL} - R_{0wL}$) between the first signal and the second signal is larger than or equal to the energy value of the sum ($L_{0wL} + R_{0wL}$) of the first and the second signal, and such that the energy value of the difference ($R_{0wR} - L_{0wR}$) between the fourth signal and the third signal is larger than or equal to the energy value of the sum ($R_{0wR} + L_{0wR}$) of the fourth signal and the third signal.

2. The method of claim 1, wherein the N-channel audio signal comprises front-channel signals and rear-channel

signals, and wherein said spatial parameters (P) comprise a measure of the relative contribution of the rear channels in the stereo down-mix (L_0, R_0) as compared to the contribution of the front channels therein.

3. The method of claim 1 or 2, wherein the magnitude of said second complex function (g_2) is smaller than the magnitude of said first complex function (g_1) and/or the magnitude of said third complex function (g_3) is smaller than the magnitude of said fourth complex function (g_4).
4. The method of claim 1, 2 or 3, wherein said second complex function (g_2) and/or said third complex function (g_3) comprises a phase shift which is substantially equal to plus or minus 90 degrees.
5. The method of any one of the preceding claims, wherein said first function (g_1) comprises first and second function parts ($g_{11L}; g_{12L}$), wherein the output of said second function part (g_{12L}) increases when said spatial parameters (P) indicate that a contribution of the rear channels in said first stereo signal (L_0) increases as compared to the contribution of the front channels in said first stereo signal (L_0), and said second function part (g_{12L}) comprises a phase shift which is substantially equal to plus or minus 90 degrees.
6. The method of claim 5, wherein said fourth function (g_4) comprises third and fourth function parts ($g_{11R}; g_{12R}$), wherein the output of said fourth function part (g_{12R}) increases when said spatial parameters (P) indicate that the contribution of the rear channels in said second stereo signal (R_0) increases as compared to the contribution of the front channels in said second stereo signal (R_0), and said fourth function part (g_{12R}) comprises a phase shift which is substantially equal to plus or minus 90 degrees.
7. The method of claim 6, wherein said first function part (g_{12L}) has an opposite sign as compared to said fourth function part (g_{12R}).
8. The method of claim 6, wherein said second function (g_2) has an opposite sign as compared to said third function (g_3).
9. The method of claim 7 or 8, wherein said second function (g_2) and said fourth function part (g_{12R}) have the same sign, and wherein said third function (g_3) and said second function part (g_{12L}) have the same sign.
10. A device (5) for processing a stereo down-mix signal comprising first and second stereo signals (L_0, R_0), the stereo down-mix signal and associated spatial parameters (P) encoding an N-channel audio signal, the device comprising:
 - first adding means for adding a first signal and a third signal to obtain a first output signal (L_{0w}), wherein said first signal (L_{0wL}) comprises said first stereo signal (L_0) modified by a first complex function (g_1), and wherein said third signal (L_{0wR}) comprises said second stereo signal (R_0) modified by a third complex function (g_3); and
 - second adding means for adding a second signal and a fourth signal to obtain a second output signal (R_{0w}), wherein said fourth signal (R_{0wR}) comprises said second stereo signal (R_0) modified by a fourth complex function (g_4), and wherein said second signal (R_{0wL}) comprises said first stereo signal (L_0) modified by a second complex function (g_2);
 wherein said complex functions are functions of said spatial parameters (P), such that an energy value of the difference ($L_{0wL} - R_{0wL}$) between the first signal and the second signal is larger than or equal to the energy value of the sum ($L_{0wL} + R_{0wL}$) of the first and the second signal and such that the energy value of the difference ($R_{0wR} - L_{0wR}$) between the fourth signal and the third signal is larger than or equal to the energy value of the sum ($R_{0wR} + L_{0wR}$) of the fourth signal and the third signal.
11. An encoder apparatus comprising:
 - an encoder (2) for encoding an N-channel audio signal into spatial parameters (P) and a stereo down-mix signal comprising first and second stereo signals (L_0, R_0), and
 - a device (5) as claimed in claim 10 for processing the stereo down-mix signal
12. A method of processing a stereo down-mix signal comprising first and second stereo signals (L_{0w}, R_{0w}), the method comprising inverting the processing operation in accordance with the method of any one of claims 1 to 9.
13. The method of claim 12, wherein the inverting comprises a matrix multiplication

5

$$\begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = \begin{bmatrix} k_1 & k_3 \\ k_2 & k_4 \end{bmatrix} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} \quad \text{with}$$

$$\begin{aligned} k_1 &= \frac{1}{g_1 g_4 - g_2 g_3} g_4 \\ k_2 &= \frac{-1}{g_1 g_4 - g_2 g_3} g_2 \\ k_3 &= \frac{-1}{g_1 g_4 - g_2 g_3} g_3 \\ k_4 &= \frac{1}{g_1 g_4 - g_2 g_3} g_1 \end{aligned}$$

10

15

wherein L_0 and R_0 are respective first and second output signals, and wherein L_{0w} and R_{0w} are respective first and second stereo input signals, and wherein g_1, g_2, g_3 and g_4 are said respective first, second, third and fourth complex functions.

20

14. A device (7) for processing a stereo down-mix signal comprising first and second stereo signals (L_{0w}, R_{0w}), the device comprising means for inverting the processing operation in accordance with the method of any one of claims 1 to 9.

25

15. The device (7) of claim 14, wherein the means for inverting comprise a matrix multiplication

30

$$\begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = \begin{bmatrix} k_1 & k_3 \\ k_2 & k_4 \end{bmatrix} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} \quad \text{with}$$

$$\begin{aligned} k_1 &= \frac{1}{g_1 g_4 - g_2 g_3} g_4 \\ k_2 &= \frac{-1}{g_1 g_4 - g_2 g_3} g_2 \\ k_3 &= \frac{-1}{g_1 g_4 - g_2 g_3} g_3 \\ k_4 &= \frac{1}{g_1 g_4 - g_2 g_3} g_1 \end{aligned}$$

35

wherein L_0 and R_0 are respective first and second output signals, and wherein L_{0w} and R_{0w} are respective first and second stereo input signal, and wherein g_1, g_2, g_3 and g_4 are said respective first, second, third and fourth complex functions.

40

16. A decoder apparatus comprising:

45

- a device (7) as claimed in claim 14 or 15 for processing stereo down-mix signal comprising first and second stereo signals (L_{0w}, R_{0w}), and
- a decoder for decoding the processed stereo signals (L_0, R_0) into an N-channel audio signal.

17. An audio system comprising an encoder apparatus as claimed in claim 11 and a decoder apparatus as claimed in claim 16.

50

Patentansprüche

55

1. Ein Verfahren zum Verarbeiten eines Stereo-Abwärtsmischsignals, das ein erstes und ein zweites Stereosignal (L_0, R_0) aufweist, wobei das Stereo-Abwärtsmischsignal und zugeordnete räumliche Parameter (P) ein N-Kanal-Audiosignal codieren, wobei das Verfahren folgende Schritte aufweist:

- Hinzusaddieren eines ersten Signals und eines dritten Signals, um ein erstes Ausgangssignal (L_{0w}) zu erhalten, wobei das erste Signal (L_{0wL}) das durch eine erste komplexe Funktion (g_1) modifizierte erste Stereosignal (L_0)

aufweist, und wobei das dritte Signal (L_{0WR}) das durch eine dritte komplexe Funktion (g_3) modifizierte zweite Stereosignal (R_0) aufweist; und

- Hinzuaddieren eines zweiten Signals und eines vierten Signals, um ein zweites Ausgangssignal (R_{0w}) zu erhalten, wobei das vierte Signal (R_{0WR}) das durch eine vierte komplexe Funktion (g_4) modifizierte zweite Stereosignal (R_0) aufweist und wobei das zweite Signal (R_{0WL}) das durch eine zweite komplexe Funktion (g_2) modifizierte erste Stereosignal (L_0) aufweist;

- wobei die komplexen Funktionen (g_1, g_2, g_3, g_4) Funktionen der räumlichen Parameter (P) sind und dahin gehend gewählt werden, dass ein Energiewert der Differenz ($L_{0WL} - R_{0WL}$) zwischen dem ersten Signal und dem zweiten Signal größer als der oder gleich dem Energiewert der Summe ($L_{0WL} + R_{0WL}$) des ersten und des zweiten Signals ist, und dass der Energiewert der Differenz ($R_{0WR} - L_{0WR}$) zwischen dem vierten Signal und dem dritten Signal größer als der oder gleich dem Energiewert der Summe ($R_{0WR} + L_{0WR}$) des vierten Signals und des dritten Signals ist.

2. Das Verfahren gemäß Anspruch 1, bei dem das N-Kanal-Audiosignal Vorderer-Kanal-Signale und Hinterer-Kanal-Signale aufweist und bei dem die räumlichen Parameter (P) ein Maß des relativen Beitrags der hinteren Kanäle bei der Stereo-Abwärtsmischung (L_0, R_0) im Vergleich zu dem Beitrag der vorderen Kanäle in derselben aufweisen.

3. Das Verfahren gemäß Anspruch 1 oder 2, bei dem der Betrag der zweiten komplexen Funktion (g_2) kleiner ist als der Betrag der ersten komplexen Funktion (g_1) und/oder der Betrag der dritten komplexen Funktion (g_3) kleiner ist als der Betrag der vierten komplexen Funktion (g_4).

4. Das Verfahren gemäß Anspruch 1, 2 oder 3, bei dem die zweite komplexe Funktion (g_2) und/oder die dritte komplexe Funktion (g_3) eine Phasenverschiebung aufweist, die im Wesentlichen plus oder minus 90 Grad beträgt.

5. Das Verfahren gemäß einem der vorhergehenden Ansprüche, bei dem die erste Funktion (g_1) einen ersten und einen zweiten Funktionsteil ($g_{11L}; g_{12L}$) aufweist, wobei der Ausgang des zweiten Funktionsteils (g_{12L}) zunimmt, wenn die räumlichen Parameter (P) angeben, dass ein Beitrag der hinteren Kanäle in dem ersten Stereosignal (L_0) im Vergleich zu dem Beitrag der vorderen Kanäle in dem ersten Stereosignal (L_0) zunimmt, und der zweite Funktionsteil (g_{12L}) eine Phasenverschiebung aufweist, die im Wesentlichen plus oder minus 90 Grad beträgt.

6. Das Verfahren gemäß Anspruch 5, bei dem die vierte Funktion (g_4) einen dritten und einen vierten Funktionsteil ($g_{11R}; g_{12R}$) aufweist, wobei der Ausgang des vierten Funktionsteils (g_{12R}) zunimmt, wenn die räumlichen Parameter (P) angeben, dass der Beitrag der hinteren Kanäle in dem zweiten Stereosignal (R_0) im Vergleich zu dem Beitrag der vorderen Kanäle in dem zweiten Stereosignal (R_0) zunimmt, und der vierte Funktionsteil (g_{12R}) eine Phasenverschiebung aufweist, die im Wesentlichen plus oder minus 90 Grad beträgt.

7. Das Verfahren gemäß Anspruch 6, bei dem das erste Funktionsteil (g_{12L}) im Vergleich zu dem vierten Funktionsteil (g_{12R}) ein entgegengesetztes Vorzeichen aufweist.

8. Das Verfahren gemäß Anspruch 6, bei dem die zweite Funktion (g_2) im Vergleich zu der dritten Funktion (g_3) ein entgegengesetztes Vorzeichen aufweist.

9. Das Verfahren gemäß Anspruch 7 oder 8, bei dem die zweite Funktion (g_2) und das vierte Funktionsteil (g_{12R}) dasselbe Vorzeichen aufweisen und bei dem die dritte Funktion (g_3) und das zweite Funktionsteil (g_{12L}) dasselbe Vorzeichen aufweisen.

10. Eine Vorrichtung (5) zum Verarbeiten eines Stereo-Abwärtsmischsignals, das ein erstes und ein zweites Stereosignal (L_0, R_0) aufweist, wobei das Stereo-Abwärtsmischsignal und zugeordnete räumliche Parameter (P) ein N-Kanal-Audiosignal codieren, wobei die Vorrichtung folgende Merkmale aufweist:

- eine erste Addiereinrichtung zum Hinzuaddieren eines ersten Signals und eines dritten Signals, um ein erstes Ausgangssignal (L_{0w}) zu erhalten, wobei das erste Signal (L_{0WL}) das durch eine erste komplexe Funktion (g_1) modifizierte erste Stereosignal (L_0) aufweist, und wobei das dritte Signal (L_{0WR}) das durch eine dritte komplexe Funktion (g_3) modifizierte zweite Stereosignal (R_0) aufweist; und

- eine zweite Addiereinrichtung zum Hinzuaddieren eines zweiten Signals und eines vierten Signals, um ein zweites Ausgangssignal (R_{0w}) zu erhalten, wobei das vierte Signal (R_{0WR}) das durch eine vierte komplexe Funktion (g_4) modifizierte zweite Stereosignal (R_0) aufweist und wobei das zweite Signal (R_{0WL}) das durch eine zweite komplexe Funktion (g_2) modifizierte erste Stereosignal (L_0) aufweist;

wobei die komplexen Funktionen (g_1, g_2, g_3, g_4) Funktionen der räumlichen Parameter (P) sind, derart, dass ein Energiewert der Differenz ($L_{0WL} - R_{0WL}$) zwischen dem ersten Signal und dem zweiten Signal größer als der oder gleich dem Energiewert der Summe ($L_{0WL} + R_{0WL}$) des ersten und des zweiten Signals ist, und dass der Energiewert der Differenz ($R_{0WR} - L_{0WR}$) zwischen dem vierten Signal und dem dritten Signal größer als der oder gleich dem Energiewert der Summe ($R_{0WR} + L_{0WR}$) des vierten Signals und des dritten Signals ist.

11. Eine Codiervorrichtung, die folgende Merkmale aufweist:

- einen Codierer (2) zum Codieren eines N-Kanal-Audiosignals in räumliche Parameter (P) und ein Stereo-Abwärtsmischsignal, das ein erstes und ein zweites Stereosignal (L_0, R_0) aufweist, und
- eine Vorrichtung (5) gemäß Anspruch 10 zum Verarbeiten des Stereo-Abwärtsmischsignals.

12. Ein Verfahren zum Verarbeiten eines Stereo-Abwärtsmischsignals, das ein erstes und ein zweites Stereosignal (L_{0w}, R_{0w}) aufweist, wobei das Verfahren ein Invertieren des Verarbeitungsvorgangs gemäß dem Verfahren eines der Ansprüche 1 bis 9 aufweist.

13. Das Verfahren gemäß Anspruch 12, bei dem das Invertieren eine Matrixmultiplikation

$$\begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = \begin{bmatrix} k_1 & k_3 \\ k_2 & k_4 \end{bmatrix} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} \quad \text{mit} \quad \begin{matrix} k_1 = \frac{1}{g_1 g_4 - g_2 g_3} g_4 \\ k_2 = \frac{-1}{g_1 g_4 - g_2 g_3} g_2 \\ k_3 = \frac{-1}{g_1 g_4 - g_2 g_3} g_3 \\ k_4 = \frac{1}{g_1 g_4 - g_2 g_3} g_1 \end{matrix},$$

aufweist, wobei L_0 und R_0 ein erstes beziehungsweise ein zweites Ausgangssignal sind und wobei L_{0w} and R_{0w} ein erstes beziehungsweise ein zweites Stereo-Eingangssignal sind und wobei g_1, g_2, g_3 und g_4 die erste, zweite, dritte beziehungsweise vierte komplexe Funktion sind.

14. Eine Vorrichtung (7) zum Verarbeiten eines Stereo-Abwärtsmischsignals, das ein erstes und ein zweites Stereosignal (L_{0w}, R_{0w}) aufweist, wobei die Vorrichtung eine Einrichtung zum Invertieren des Verarbeitungsvorgangs gemäß dem Verfahren eines der Ansprüche 1 bis 9 aufweist.

15. Die Vorrichtung (7) gemäß Anspruch 14, bei der die Einrichtung zum Invertieren eine Matrixmultiplikation

$$\begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = \begin{bmatrix} k_1 & k_3 \\ k_2 & k_4 \end{bmatrix} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} \quad \text{mit} \quad \begin{matrix} k_1 = \frac{1}{g_1 g_4 - g_2 g_3} g_4 \\ k_2 = \frac{-1}{g_1 g_4 - g_2 g_3} g_2 \\ k_3 = \frac{-1}{g_1 g_4 - g_2 g_3} g_3 \\ k_4 = \frac{1}{g_1 g_4 - g_2 g_3} g_1 \end{matrix},$$

aufweist, wobei L_0 und R_0 ein erstes beziehungsweise ein zweites Ausgangssignal sind und wobei L_{0w} und R_{0w} ein erstes beziehungsweise ein zweites Stereo-Eingangssignal sind und wobei g_1 , g_2 , g_3 und g_4 die erste, zweite, dritte beziehungsweise vierte komplexe Funktion sind.

5 16. Eine Decodiervorrichtung, die folgende Merkmale aufweist:

- eine Vorrichtung (7) gemäß Anspruch 14 oder 15 zum Verarbeiten eines Stereo-Abwärtsmischsignals, das ein erstes und ein zweites Stereosignal (L_{0w} , R_{0w}) aufweist, und
- einen Decodierer zum Decodieren der verarbeiteten Stereosignale (L_0, R_0) zu einem N-Kanal-Audiosignal.

10 17. Ein Audiosystem, das eine Codiervorrichtung gemäß Anspruch 11 und eine Decodiervorrichtung gemäß Anspruch 16 aufweist.

15 **Revendications**

1. Procédé de traitement d'un signal de mélange descendant stéréo comprenant un premier et un deuxième signal stéréo (L_0 , R_0), le signal de mélange descendant stéréo et les paramètres spatiaux associés (P) codant un signal audio à N canaux, le procédé comprenant les étapes consistant à:

20 - additionner un premier signal et un troisième signal, pour obtenir un premier signal de sortie (L_{0w}), où ledit premier signal (L_{0wL}) comprend ledit premier signal stéréo (L_0) modifié par une première fonction complexe (g_1), et où ledit troisième signal (L_{0wR}) comprend ledit deuxième signal stéréo (R_0) modifié par une troisième fonction complexe (g_3); et

25 - additionner un deuxième signal et un quatrième signal, pour obtenir un deuxième signal de sortie (R_{0w}), où ledit quatrième signal (R_{0wR}) comprend ledit deuxième signal stéréo (R_0) modifié par une quatrième fonction complexe (g_4) et où ledit deuxième signal (R_{0wL}) comprend ledit premier signal stéréo (L_0) modifié par une deuxième fonction complexe (g_2);

30 - dans lequel lesdites fonctions complexes (g_1 , g_2 , g_3 , g_4) sont des fonctions desdits paramètres spatiaux (P) et sont choisies de sorte qu'elles soient telle qu'une valeur d'énergie de la différence ($L_{0wL}-R_{0wL}$) entre le premier signal et le deuxième signal soit supérieure ou égale à la valeur d'énergie de la somme ($L_{0wL}+R_{0wL}$) du premier et du deuxième signal, et de sorte que la valeur d'énergie de la différence ($R_{0wR}-L_{0wR}$) entre le quatrième signal et le troisième signal soit supérieure ou égale à la valeur d'énergie de la somme ($R_{0wR}+L_{0wR}$) du quatrième signal et du troisième signal.

35 2. Procédé selon la revendication 1, dans lequel le signal audio à N canaux comprend des signaux de canaux avant et des signaux de canaux arrière, et dans lequel lesdits paramètres spatiaux (P) comprennent une mesure de la contribution relative des canaux arrière dans le mélange descendant stéréo (L_0 , R_0), comparé à la contribution des canaux avant dans ce dernier.

40 3. Procédé selon la revendication 1 ou 2, dans lequel l'amplitude de ladite deuxième fonction complexe (g_2) est inférieure à l'amplitude de ladite première fonction complexe (g_1) et/ou l'amplitude de ladite troisième fonction complexe (g_3) est inférieure à l'amplitude de ladite quatrième fonction complexe (g_4).

45 4. Procédé selon la revendication 1, 2 ou 3, dans lequel ladite deuxième fonction complexe (g_2) et/ou ladite troisième fonction complexe (g_3) comprend un déphasage qui est sensiblement égal à plus ou moins 90 degrés.

50 5. Procédé selon l'une quelconque des revendications précédentes, dans lequel ladite première fonction (g_1) comprend une première et une deuxième partie de fonction (g_{11L} ; g_{12L}), dans lequel la sortie de ladite deuxième partie de fonction (g_{12L}) augmente lorsque lesdits paramètres spatiaux (P) indiquent qu'une contribution des canaux arrière dans ledit premier signal stéréo (L_0) augmente, comparé à la contribution des canaux avant dans ledit premier signal stéréo (L_0), et ladite deuxième partie de fonction (g_{12L}) comprend un déphasage qui est sensiblement égal à plus ou moins 90 degrés.

55 6. Procédé selon la revendication 5, dans lequel ladite quatrième fonction (g_4) comprend une troisième et une quatrième partie de fonction parts (g_{11R} ; g_{12R}), dans lequel la sortie de ladite quatrième partie de fonction (g_{12R}) augmente lorsque lesdits paramètres spatiaux (P) indiquent qu'une contribution des canaux arrière dans ledit deuxième signal stéréo (R_0) augmente, comparé à la contribution des canaux avant dans ledit deuxième signal stéréo (R_0), et ladite

quatrième partie de fonction (g_{12R}) comprend un déphasage qui est sensiblement égal à plus ou moins 90 degrés.

7. Procédé selon la revendication 6, dans lequel ladite première partie de fonction (g_{12L}) a un signe opposé à celui de ladite quatrième partie de fonction (g_{12R}).

8. Procédé selon la revendication 6, dans lequel ladite deuxième fonction (g_2) a un signe opposé à celui de ladite troisième fonction (g_3).

9. Procédé selon la revendication 7 ou 8, dans lequel ladite deuxième fonction (g_2) et ladite quatrième partie de fonction (g_{12R}) ont le même signe, et dans lequel ladite troisième fonction (g_3) et ladite deuxième partie de fonction (g_{12L}) ont le même signe.

10. Dispositif (5) de traitement d'un signal de mélange descendant stéréo comprenant un premier et un deuxième signal stéréo (L_0, R_0), le signal de mélange descendant stéréo et les paramètres spatiaux associés (P) codant un signal audio à N canaux, le dispositif comprenant:

- un premier moyen d'addition destiné à additionner un premier signal et un troisième signal, pour obtenir un premier signal de sortie (L_{0w}), où ledit premier signal (L_{0wL}) comprend ledit premier signal stéréo (L_0) modifié par une première fonction complexe (g_1), et où ledit troisième signal (L_{0wR}) comprend ledit deuxième signal stéréo (R_0) modifié par une troisième fonction complexe (g_3); et

- un deuxième moyen d'addition destiné à additionner un deuxième signal et un quatrième signal, pour obtenir un deuxième signal de sortie (R_{0w}), où ledit quatrième signal (R_{0wR}) comprend ledit deuxième signal stéréo (R_0) modifié par une quatrième fonction complexe (g_4) et où ledit deuxième signal (R_{0wL}) comprend ledit premier signal stéréo (L_0) modifié par une deuxième fonction complexe (g_2);

- dans lequel lesdites fonctions complexes (g_1, g_2, g_3, g_4) sont des fonctions desdits paramètres spatiaux (P) de sorte qu'une valeur d'énergie de la différence ($L_{0wL} - R_{0wL}$) entre le premier signal et le deuxième signal soit supérieure ou égale à la valeur d'énergie de la somme ($L_{0wL} + R_{0wL}$) du premier et du deuxième signal, et de sorte que la valeur d'énergie de la différence ($R_{0wR} - L_{0wR}$) entre le quatrième signal et le troisième signal soit supérieure ou égale à la valeur d'énergie de la somme ($R_{0wR} + L_{0wR}$) du quatrième signal et du troisième signal.

11. Appareil de codage comprenant:

- un codeur (2) destiné à coder un signal audio à N canaux en paramètres spatiaux (P) et un signal de mélange descendant stéréo comprenant un premier et un deuxième signal stéréo (L_0, R_0), et

- un dispositif (5) selon la revendication 10 destiné à traiter le signal de mélange descendant stéréo.

12. Procédé de traitement d'un signal de mélange descendant stéréo comprenant un premier et un deuxième signal stéréo (L_0, R_0), le procédé comprenant le fait d'inverser l'opération de traitement selon le procédé de l'une quelconque des revendications 1 à 9.

13. Procédé selon la revendication 12, dans lequel l'inversion comprend une multiplication matricielle

$$\begin{bmatrix} L_0 \\ R_0 \end{bmatrix} = \begin{bmatrix} k_1 & k_3 \\ k_2 & k_4 \end{bmatrix} \begin{bmatrix} L_{0w} \\ R_{0w} \end{bmatrix} \text{ avec } \begin{matrix} k_1 = \frac{1}{g_1 g_4 - g_2 g_3} g_4 \\ k_2 = \frac{-1}{g_1 g_4 - g_2 g_3} g_2 \\ k_3 = \frac{-1}{g_1 g_4 - g_2 g_3} g_3 \\ k_4 = \frac{1}{g_1 g_4 - g_2 g_3} g_1 \end{matrix},$$

où L_0 et R_0 sont les premier et deuxième signaux de sortie respectifs, et où L_{0w} et R_{0w} sont les premier et deuxième signaux d'entrée stéréo respectifs, et où g_1, g_2, g_3 et g_4 sont lesdites première, deuxième, troisième et quatrième fonctions complexes respectives.

14. Dispositif (7) de traitement d'un signal de mélange descendant stéréo comprenant un premier et un deuxième signal stéréo (L_{0w} , R_{0w}), le dispositif comprenant un moyen pour inverser l'opération de traitement selon le procédé de l'une quelconque des revendications 1 à 9.

5 15. Dispositif (7) selon la revendication 14, dans lequel le moyen pour inverser comprend une multiplication matricielle

$$\begin{aligned}
 & \left[\begin{array}{c} L_0 \\ R_0 \end{array} \right] = \left[\begin{array}{cc} k_1 & k_3 \\ k_2 & k_4 \end{array} \right] \left[\begin{array}{c} L_{0w} \\ R_{0w} \end{array} \right] \text{ avec} \\
 & k_1 = \frac{1}{g_1 g_4 - g_2 g_3} g_4 \\
 & k_2 = \frac{-1}{g_1 g_4 - g_2 g_3} g_2 \\
 & k_3 = \frac{-1}{g_1 g_4 - g_2 g_3} g_3 \\
 & k_4 = \frac{1}{g_1 g_4 - g_2 g_3} g_1
 \end{aligned}$$

où L_0 et R_0 sont les premier et deuxième signaux de sortie respectifs, et où L_{0w} et R_{0w} sont les premier et deuxième signaux d'entrée stéréo respectifs, et où g_1 , g_2 , g_3 et g_4 sont lesdites première, deuxième, troisième et quatrième fonctions complexes respectives.

25 16. Appareil de décodage comprenant:

- un dispositif (7) selon la revendication 14 ou 15 destiné à traiter un signal de mélange descendant stéréo comprenant un premier et un deuxième signal stéréo (L_{0w} , R_{0w}), et
- un décodeur destiné à décoder les signaux stéréo traités (L_0 , R_0) en un signal audio à N canaux.

17. Système audio comprenant un appareil de codage selon la revendication 11 et un appareil de décodage selon la revendication 16.

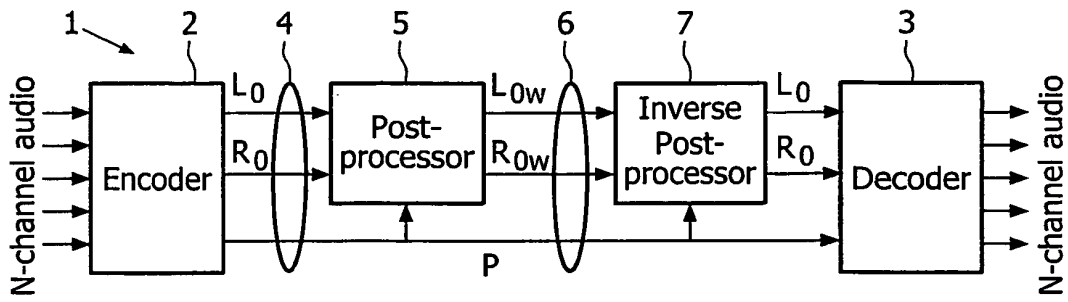


FIG. 1

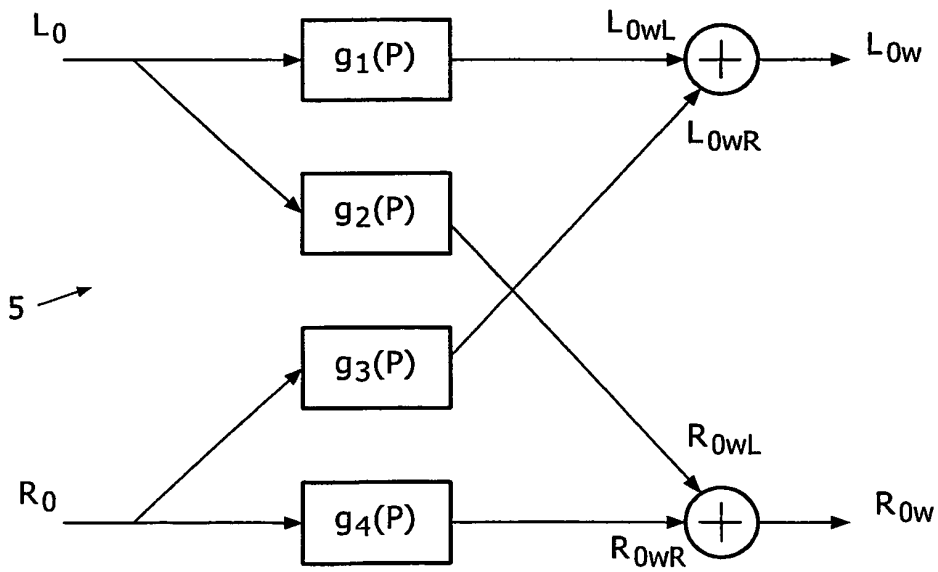


FIG. 2

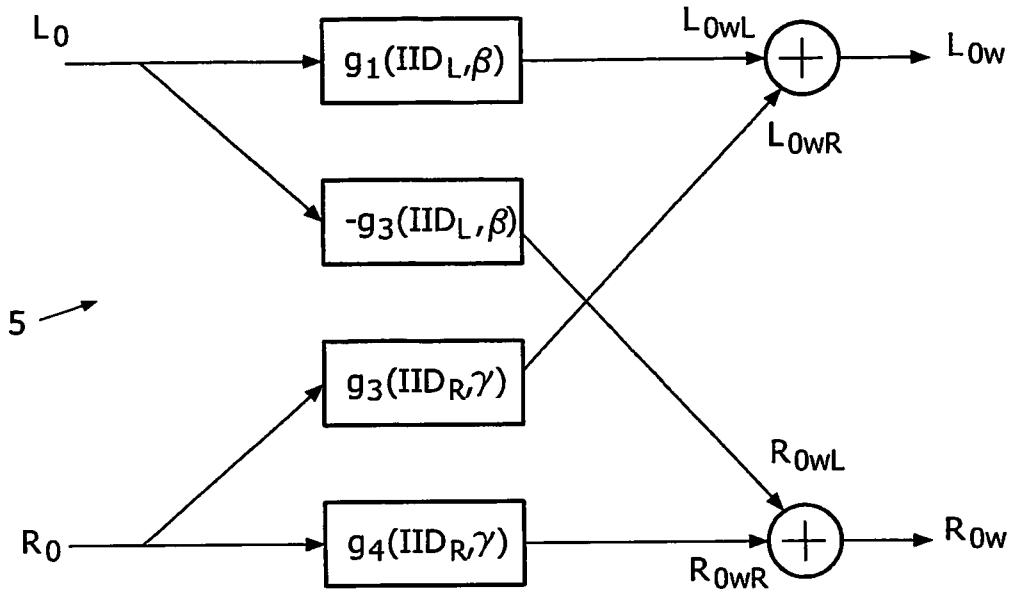


FIG. 3

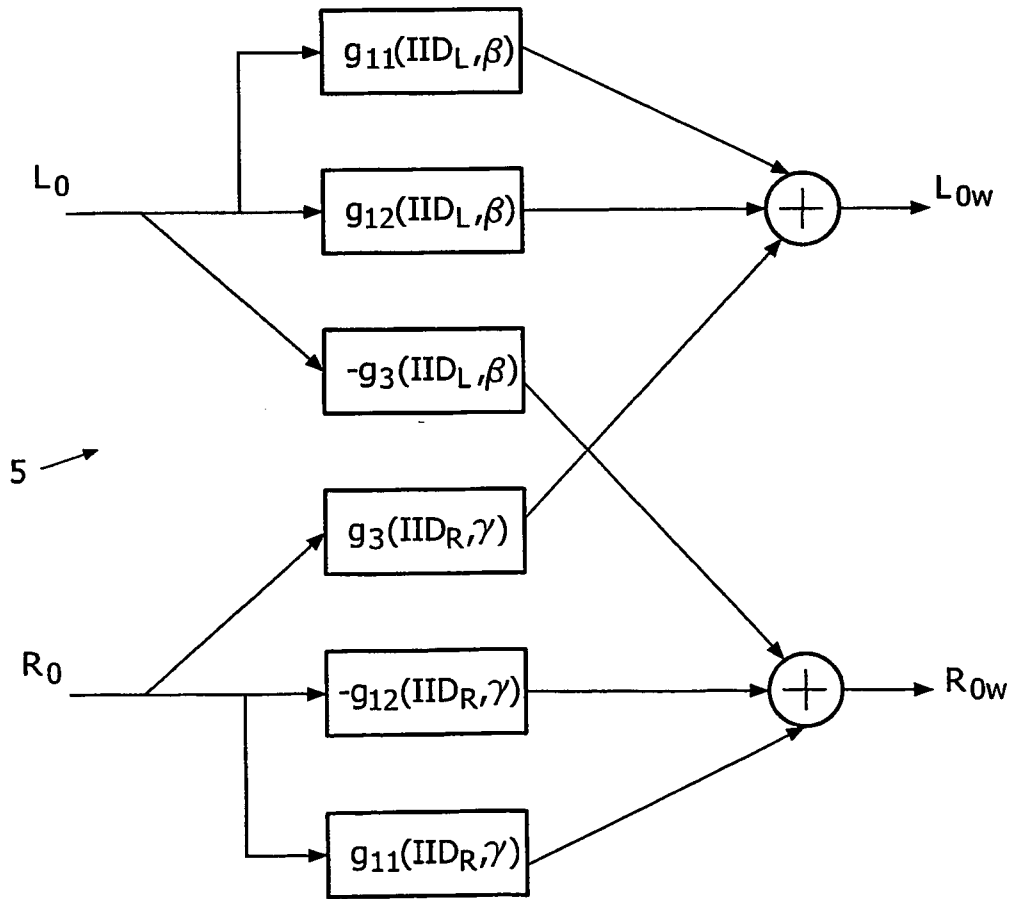


FIG. 4

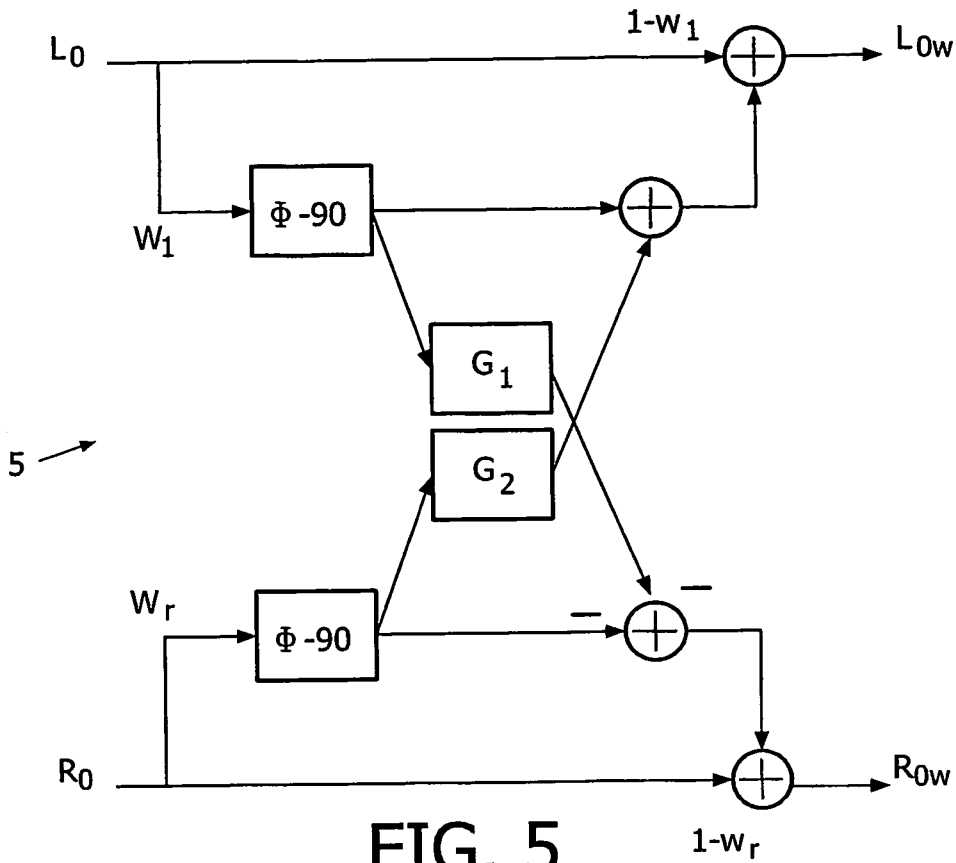


FIG. 5

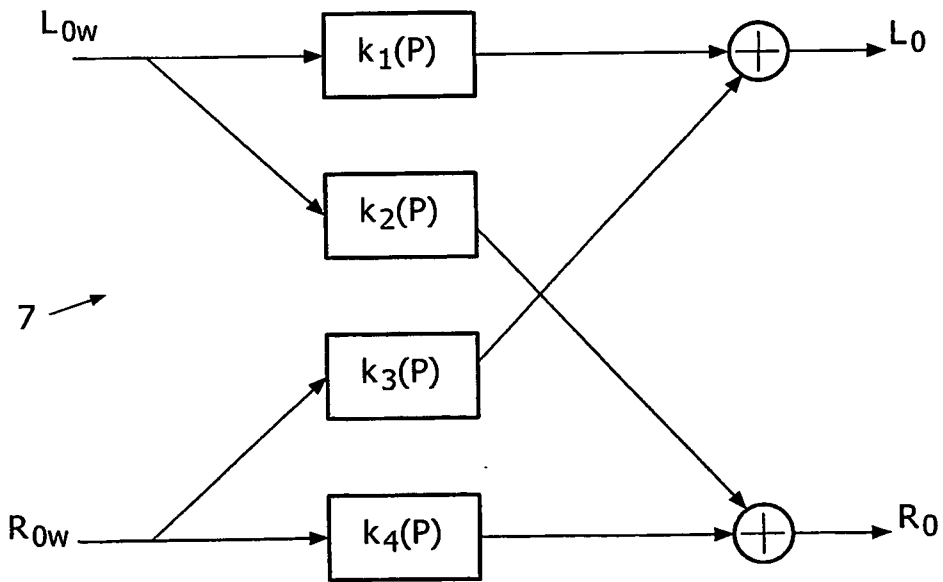


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6198827 B [0007]
- US 5818941 A, EMBREE [0014]
- US 6697491 B1, GRIESINGER DAVID H [0014]

Non-patent literature cited in the description

- **Kenneth Gundry**. A new active matrix decoder for surround sound. *Proc. AES 19th International Conference on Surround Sound*, June 2001 [0007]